

# TECHNICAL SPECIFICATIONS

## DR023 – SANDVIK DE710 Drill Rig



### Carrier

Track mounted Crawler

### Build Date

2011

### Rig Dimensions

Base length:		m
Base width:	2.20	m
Height Mast Down:	2.25	m
Height Mast Up:	9.10	m
Weight:	6,000	kg

### Standard Features

Usable Fuel Capacity:		l
Max Feed Force:	53.2	kN
Max Stroke:	3.45	m
Max Rod Pull:	30	m
Max Power:	134	kW

### Maximum Practical Depth (Fluid Filled)

BQ Drilling:	1140	m
NQ Drilling:	1126	m
HQ Drilling:	754	m
PQ Drilling:	509	m
AQ Drilling:	1841	m


### Water Pump

FMC W011 – Diamond Drilling Pump

Pump Flow (L/Min):	140	lpm
Max Pump Pressure:	1000	psi

### Additional Rig Features

- Fitted with secondary high capacity Gardner Denver 4 x 5 mud pump.
- Rod spinner assembly.
- Fire Suppression unit.
- Rotation safety cage.
- Emergency "E" stops.

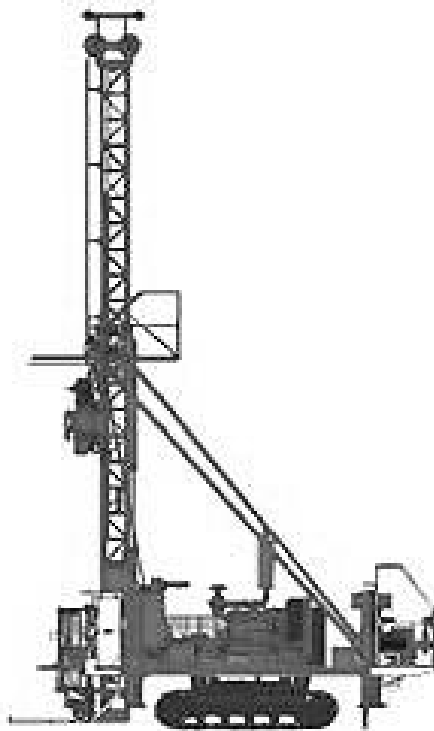

Free call 1800 082 200  
[www.hagstromdrilling.com.au](http://www.hagstromdrilling.com.au)